



D30

Adjustable LED Downlight

malisa

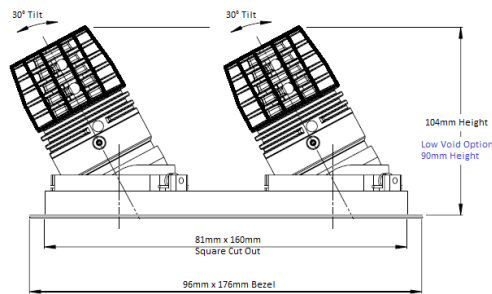

FINISH	White Bezel & Black Baffle (RAL Colours available upon request)	COLOUR TEMP	2700k (2938k, 3000k, 4000k or 5000k available upon request)
DIMENSIONS	h 104mm x 96mm x 176mm	LUMENS	1924lms
LO-VOID DIMS	h 90mm x 96mm x 176mm	EFFICACY	65lm/w
CUT-OUT	81mm x 160mm Square Cut-out (allow for 10mm void space)	CRI	85 (95 CRI available on request)
IP RATING	IP44 (IP65 available upon request)	C.C. or C.V	Constant Current
BEAM ANGLE	20°, 30°, or 46°	FIRE RATING	Yes FP72
WATTAGE	23w	DIMMING	Non-dim, mains dimming, 1-10v dimming, or DALI dimming
CURRENT	700mA	EMERGENCY	Remote, 3hr Maintained Available
DRIVER	DR1 – Non Dimmable DR2 – Mains Dimmable DR6 – 1-10v Dimmable	ORDER CODE	D30